


Voltage Transducer LV 25-1200

$V_{PN} = 1200 \text{ V}$

For the electronic measurement of voltages : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high voltage) and the secondary circuit (electronic circuit).



Electrical data

V_{PN}	Primary nominal r.m.s. voltage	1200	V			
V_P	Primary voltage, measuring range	0 .. ± 1800	V			
I_{PN}	Primary nominal r.m.s. current	6.7	mA			
R_M	Measuring resistance	$R_{M \min}$	$R_{M \max}$			
				with $\pm 12 \text{ V}$	@ $\pm 1200 \text{ V}_{\max}$	30
			@ $\pm 1800 \text{ V}_{\max}$	30	100	Ω
		with $\pm 15 \text{ V}$	@ $\pm 1200 \text{ V}_{\max}$	100	320	Ω
			@ $\pm 1800 \text{ V}_{\max}$	100	180	Ω
I_{SN}	Secondary nominal r.m.s. current	25	mA			
K_N	Conversion ratio	1200 V / 25 mA				
V_C	Supply voltage ($\pm 5 \%$)	$\pm 12 \dots 15$	V			
I_C	Current consumption	10 (@ $\pm 15 \text{ V}$) + I_S	mA			
V_d	R.m.s. voltage for AC isolation test ¹⁾ , 50 Hz, 1 mn	4.1	kV			

Features

- Closed loop (compensated) voltage transducer using the Hall effect
- Transducer with insulated plastic case recognized according to UL 94-V0
- Primary resistor R_1 and transducer mounted on printed circuit board 128 x 60 mm.

Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- High immunity to external interference.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.

Accuracy - Dynamic performance data


X_G	Overall Accuracy @ $V_{PN}, T_A = 25^\circ\text{C}$	± 0.8	%
e_L	Linearity	< 0.2	%
I_O	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	Max
			± 0.15 mA
I_{OT}	Thermal drift of I_O	- 25°C .. + 25°C	± 0.10 ± 0.60 mA
		+ 25°C .. + 70°C	± 0.10 ± 0.35 mA
t_r	Response time @ 90 % of V_{PN}	60	μs

General data

T_A	Ambient operating temperature	- 25 .. + 70	$^\circ\text{C}$
T_S	Ambient storage temperature	- 40 .. + 85	$^\circ\text{C}$
N	Turns ratio	3700 : 1000	
P	Total primary power loss	8	W
R_1	Primary resistance @ $T_A = 25^\circ\text{C}$	180	k Ω
R_S	Secondary coil resistance @ $T_A = 70^\circ\text{C}$	110	Ω
m	Mass	60	g
	Standards ²⁾	EN 50178	

Notes : ¹⁾ Between primary and secondary
²⁾ A list of corresponding tests is available

Dimensions LV 25-1200 (in mm. 1 mm = 0.0394 inch)

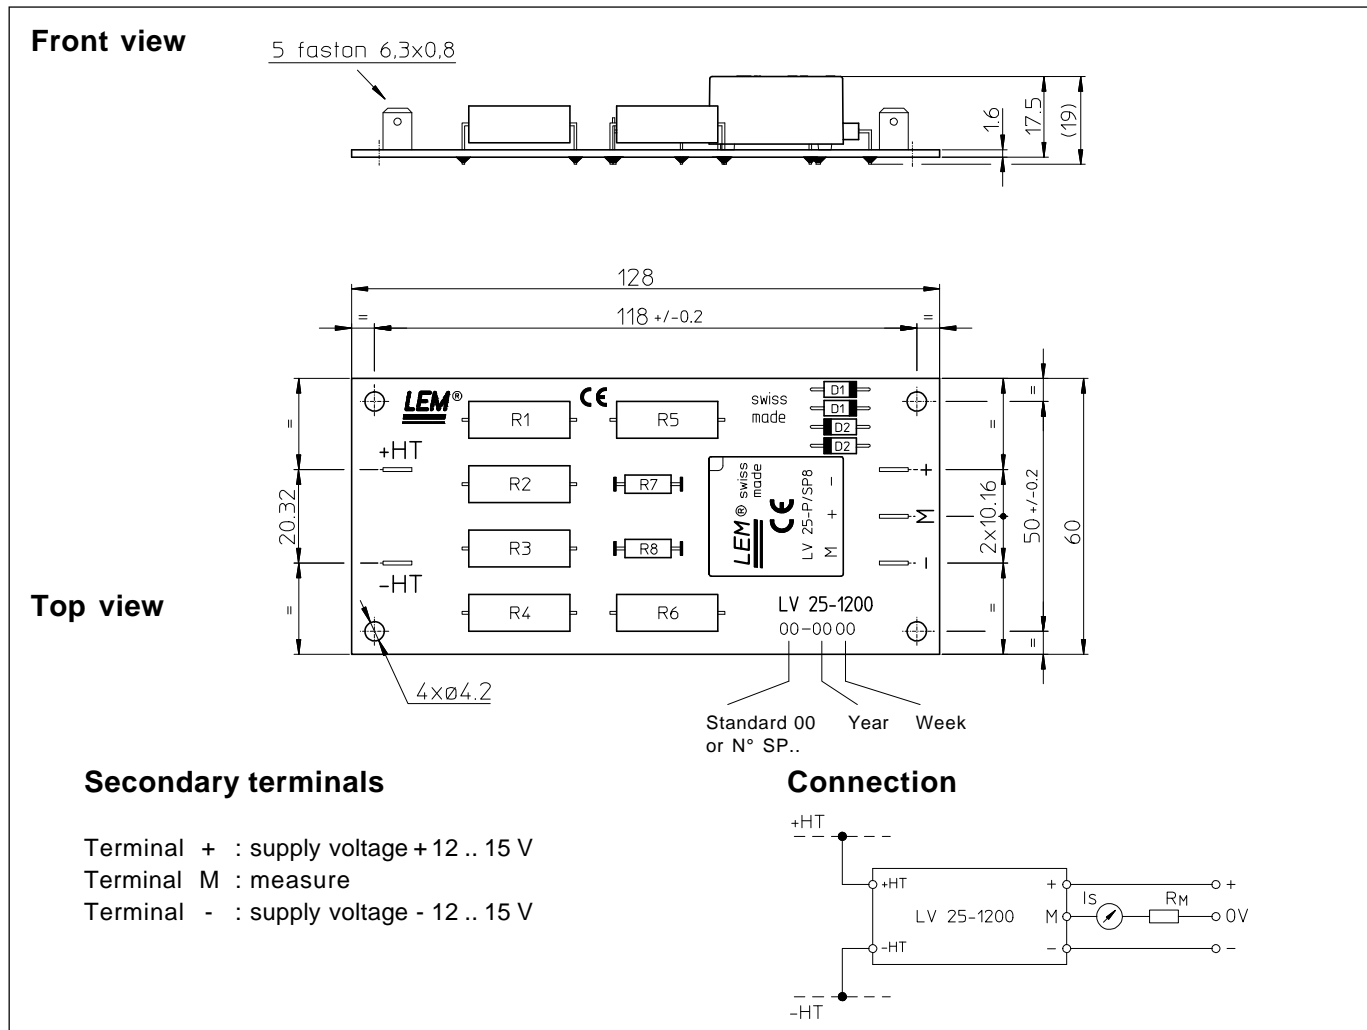

Mechanical characteristics

- General tolerance ± 0.3 mm
- Fastening 4 holes $\varnothing 4.2$ mm
- Connection of primary Faston 6.3 x 0.8 mm
- Connection of secondary Faston 6.3 x 0.8 mm

Remarks

- I_s is positive when V_p is applied on terminal +HT.
- The primary circuit of the transducer must be linked to the connections where the voltage has to be measured.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.